

LED Linear High Bays

HBL-03-G2



Better solutions for a Led Linear Highbays


IP65 water-proof

AC100-277V 50/60Hz

Easy Installation

130Lm/w

Options

Power

 MEAN WELL DRIVER
 ELG series A: Standard
 ELG series B: Dimmable 0-10V
 ELG series DA: Dimmable DALI

Color

 3000K
 4000K
 5700K

Beam Angle

 30×70°
 60×100°



Application

 Factories, Steel Mills, Steel Smelting Plants, Farms, sport Facilities & Workshops,
 Storage Facilities & Warehouses, Supermarkets & Department Stores, Showrooms,
 Design Centers & Galleries.




Specifications

Item	Power	Lumen	Leds	CRI	Weight	Beam Angle
BR-HBL50W-03-G2	50W	6500Lm	LUMILEDS 3030	> 80	1.87kg	30×70°/60×100°
BR-HBL100W-03-G2	100W	13000Lm	LUMILEDS 3030	> 80	3.56kg	30×70°/60×100°
BR-HBL150W-03-G2	150W	19500Lm	LUMILEDS 3030	> 80	4.67kg	30×70°/60×100°
BR-HBL200W-03-G2	200W	26000Lm	LUMILEDS 3030	> 80	5.91kg	30×70°/60×100°

Dimensions(mm)

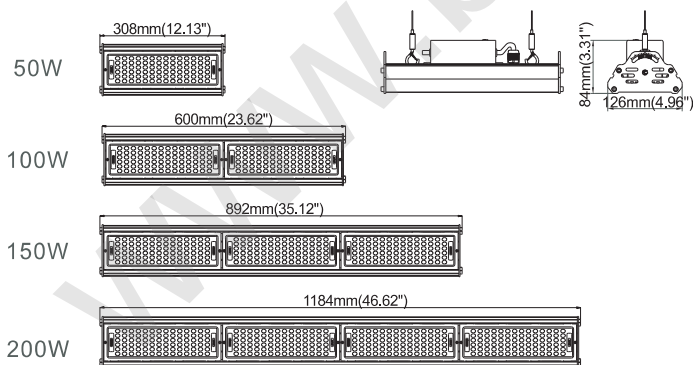

Photometry

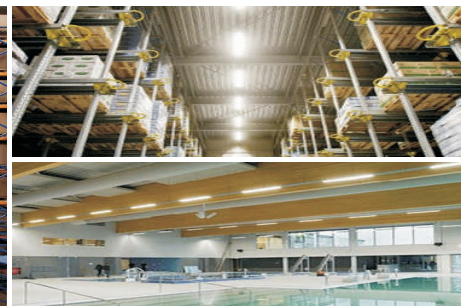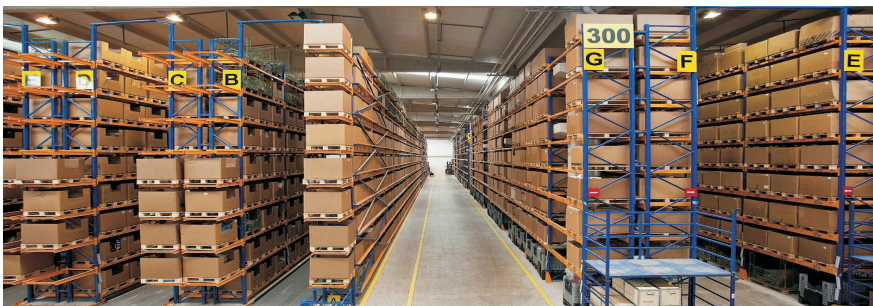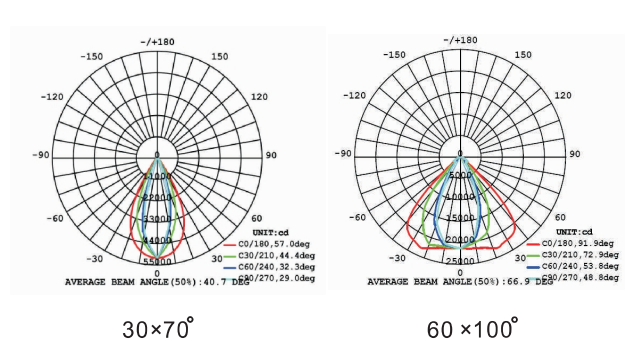

HBL-03-G2

Model Options




P1 Hanging Installation (Standard)




P2 Ceiling Installation

Installation and use

P1 Hanging Installation (Standard)

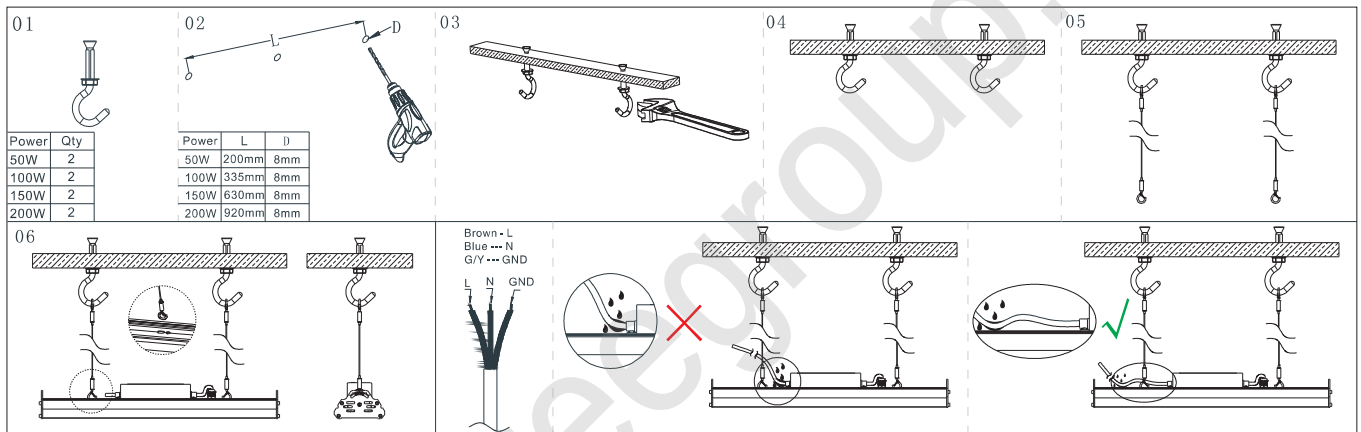

P2 Ceiling Installation

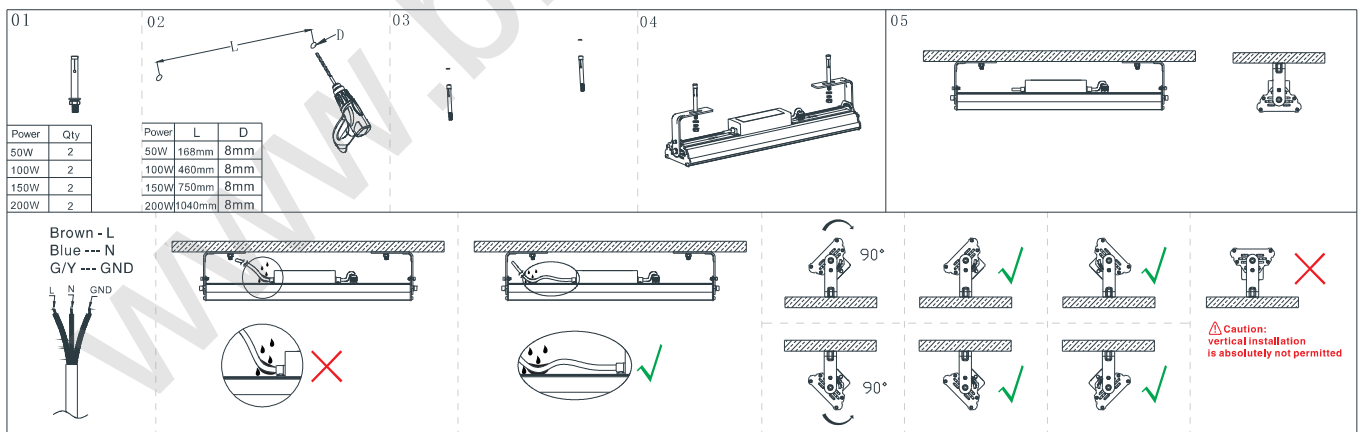

Packing Spec

Item	Box			Carton		
	Measurement(mm)	Gross weight	Pcs/box	Measurement(mm)	Gross weight	Pcs/box
BR-HBL50W-03-G2	L360*W195*H140	3.17kg	1	L415*W385*H315	12.68kg	4
BR-HBL100W-03-G2	L650*W195*H140	4.86kg	1	L670*W220*H315	10.22kg	2
BR-HBL150W-03-G2	L945*W195*H140	5.97kg	1	L965*W220*H315	11.94kg	2
BR-HBL200W-03-G2	L1235*W195*H140	7.21kg	1	L1260*W220*H315	14.42kg	2